

AIR REFRIGERANT TYPE REFRIGERATOR

Publication number: JP11132582

Publication date: 1999-05-21

Inventor: KATO SATOSHI; NIKAI ISAO; UDA MOTOHISA;
FURUKAWA KAZUO

Applicant: KAJIMA CORP; NHK SPRING CO LTD

Classification:

- **international:** **F25B9/00; F25B9/00;** (IPC1-7): F25B9/00

- **European:**


Application number: JP19970309555 19971024

Priority number(s): JP19970309555 19971024

[Report a data error here](#)

Abstract of **JP11132582**

PROBLEM TO BE SOLVED: To prevent the efficiency of a refrigerator from lowering due to moisture and floating substance mixed into the air while purifying the air when the air from a chamber required to be cooled is taken, as refrigerant, into an air refrigerant type refrigerator and the chamber is cooled by blowing cooled air directly from the refrigerator. **SOLUTION:** The air refrigerant type refrigerator comprises a compressor 7, an air cooler 8, an air to air heat exchanger 9 and an expansion unit 10 arranged in an air passage and the air in a chamber B required to be cooled is taken into a compressor 7 through the heat exchanger 9 before being blown into the chamber B from the expansion unit 10. The refrigerator further comprises a first bypath 13 provided with a valve for returning the air from the expansion unit 10 partially or entirely back to the heat exchanger 9 while bypassing the chamber B, a hot air bypath 14 provided with a valve for taking in the air of 0 deg.C or above from the air passage between the compressor and the expansion unit and supplying the air to the inlet side of the heat exchanger 9, or a hot air bypath for taking in high temperature compressed air from the air passage between the compressor and the expansion unit before entering into the air cooler 8 or the air heat exchanger 9 and supplying the air to the air passage on the inlet side of the expansion unit.

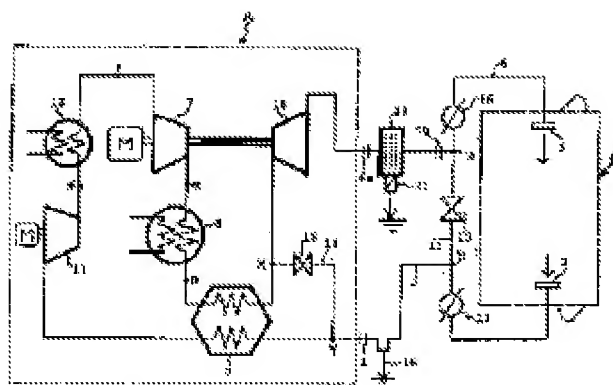

Data supplied from the **esp@cenet** database - Worldwide

